

GENERAL


OUTPUT RATINGS 50Hz, 380-415V

YP60 60kVA, 48kW

YP66E 66kVA, 52.8kW

ENGINE PERKINS 1103A-33TG2

ALTERNATOR LEROY SOMER

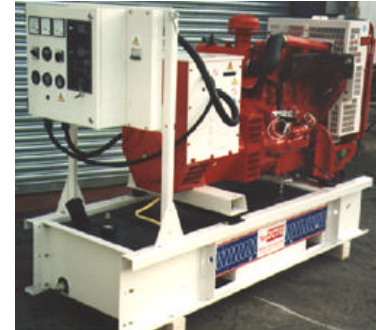

TECHNICAL DATA


Engine Model	1103A-33TG2		YP60	YP66E
Cylinders	3	Fuel Cons: 100% Load l/hr	13.8	15.5
Cubic Capacity	3.3 Litres			
Aspiration	Turbocharged	Cooling Air Flow : m ³ /min	TBA	
Engine Speed (RPM)	1500	Exhaust Gas Flow : m ³ /min	TBA	
Fuel Tank Capacity	175 Litres	Exhaust Temp : °C	TBA	

Rating Definitions

YP60 continuous power : There is no limitation to annual hours of operation and these models can supply 10% overload for 1 in 12 hours

YP66E Standby power : Ratings only applicable for supplying power in event of power failure. No overload is permitted on these ratings.

GENERAL ARRANGEMENT

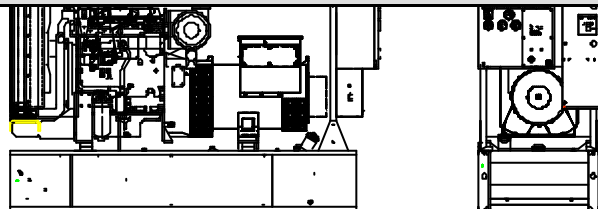

DIMENSIONS AND WEIGHTS

Length mm	Width Mm	Height Mm	Weight inc Lube Oil Kg	Weight inc Lube Oil & Coolant
2149	752	1366	945	960