

60kVA Canopied Set

82dBA @ 1m



GENERAL

OUTPUT RATINGS 50Hz, 380-415V

YP60	60kVA, 48kW
YP66E	66kVA, 52.8kW
ENGINE	PERKINS 1103A-33TG2
ALTERNATOR	LEROY SOMER



TECHNICAL DATA



Engine Model	1103A-33TG2		YP60	YP66E
Cylinders	3	Fuel Cons: 100% Load l/hr	13.8	15.5
Cubic Capacity	3.3 Litres			
Aspiration	TUBOCHARGED	Cooling Air Flow : m ³ /min	TBA	
Engine Speed (RPM)	1500	Exhaust Gas Flow : m ³ /min	TBA	
Fuel Tank Capacity	245 Litres	Exhaust Gas Temp : °C	TBA	

Rating Definitions

YP60 continuous power : There is no limitation to annual hours of operation and these models can supply 10% overload for 1 in 12 hours.

YP66E Standby power : Ratings only applicable for supplying power in event of power failure. No overload is permitted on these ratings.

GENERAL ARRANGEMENT

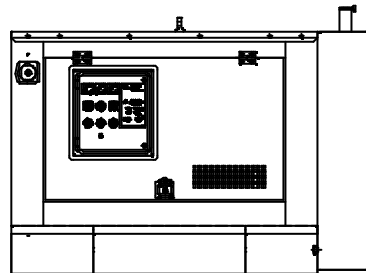

DIMENSIONS AND WEIGHTS

Length mm	Width mm	Height Mm	Weight inc Lube Oil Kg
2090	1100	1640	1315