

Model: **YXP80RS**

Enclosed set



Open set



Frequency	Phases	Power Factor	Prime Output	Standby Output
50Hz	3	0.8	80 kVA / 64 kW	88 kVA / 70 kW

**Ratings**

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

**Design features**

- High quality assembly, providing stiffness and low vibration
- Power coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

**Design Standards**

- CE marking
- ISO8528-1995
- GB/T2820-1997
- ISO 9001:2015 Registered Company

**Configuration**

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank
- Fuel level sensor
- Auto start control system with electronic digital control module DSE7420
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V starter battery with leads and switch

\*\* The images above are for illustration purposes only.

## Engine data





Engine brand	Perkins	Total coolant capacity	13 Litres
Engine model	1104A-44TG2	Total lube oil capacity	8 Litres
Engine speed	1500 RPM	Cooling air flow	89 m <sup>3</sup> /min
Number of cylinders	4	Exhaust gas flow	13.3 m <sup>3</sup> /min
Aspiration	Turbocharged	Exhaust gas temperature	580°C
Combustion system	Direct injection	Fuel cons. @ 110% standby load	20.5 l/hr
Displacement	4.4 Litres	Fuel cons. @ 100% Prime load	18.7 l/hr
Governor type	Mechanical	Fuel cons. @ 75% Prime load	14.0 l/hr
Cooling system	Water Cooled	Fuel cons. @ 50% Prime load	9.7 l/hr

## Alternator data

Alternator brand	Leroy Somer	Number of wires	12 re-connectable
Alternator model	LSA44.3S3	AVR model	R 250
Excitation	Self excited	Voltage regulation	± 0.5%
Insulation class	H	Total Harmonic distortion	< 2%
Drip proof protection	IP23	Telephone interference	TIF < 50%, THF < 2%
Winding pitch	2/3 (wdg 6)	Flanges and shield	Cast Iron

## Enclosed set data

## Open set data

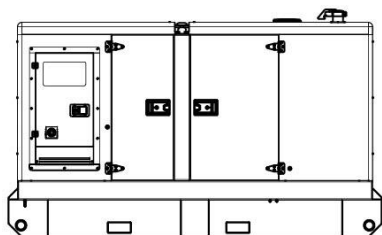

L x W x H (mm)	Weight	Fuel tank	Noise@7M
2788 x 1165 x 1700	1730 kg	180 Litres	70db

L x W x H (mm)	Weight	Fuel tank	Noise@7M
2083 x 811 x 1366	1088 kg	265 Litres	111db

\*\* Due to constant innovation, design and specifications are subject to change without notice.