

Genset  
Model:

## YTP1485RS & YTP1485RSC

T-Series

Enclosed set



Frequency	Phase	Power Factor	Prime Output	Standby
50Hz	3	0.8	1350kVA / 1080kW	1485kVA / 1188kW

### Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L. 30% relative humidit

### Design Features

- High quality assembly, providing stiffness and low vibration
- Powder coated steel, treated with anti corrosion paint
- Compact and easy access for service
- Wiring and connectors with protection
- All moving parts protected with guards
- Synchronised upgrade options available
- Governor type: electronic / mechanical
- Battery charger and block heater options
- BMS output signaling included

### Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial / residential silencer
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator
- Anti vibration mountings
- Integral fuel tank (with bunded base option)
- Fuel level gauge
- Auto start control system with electronic digital control module DSE7320
- ABB output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V / 24V starter battery with leads and isolator switch

### Acoustic canopy features

- Weather proof enclosure
- Fully lockable doors and control panel
- High quality sound absorbing material
- Lifting lugs

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
+44 1977 688155 • sales@yorpower.com

[www.yorpower.com](http://www.yorpower.com)


## Engine data

Engine brand	Perkins	Total coolant capacity	201 Litres
Engine model	4012-46TWG3A	Total lube oil capacity	177 Litres
Engine speed	1500 RPM	Cooling air flow	1680 m <sup>3</sup> /min
Cylinders	12	Exhaust gas flow	182 m <sup>3</sup> /min
Aspiration	Turbo Charged - Aftercooler	Exhaust gas temperature	474 °C
Combustion system	Direct injection	Fuel cons. @ 110% standby load	318 l/hr
Displacement	45.84 Litres	Fuel cons. @ 100% Prime load	283 l/hr
Governor type	Electronic	Fuel cons. @ 75% Prime load	213 l/hr
Cooling System	Water	Fuel cons. @ 50% Prime load	151 l/hr

## Alternator data


Alternator brand	Leroy Somer	Number of wires	6
Alternator model	LSA 50.2L7	Efficiency	95.1%
Excitation	AVR, Brushless	Voltage regulation	± 0.5%
Insulation class	H	Total Harmonic distortion	< 3.5% no load
Drip proof protection	IP23	AVR	Brushless
Connection type	STAR	Power factor	0.8

## Enclosed set data

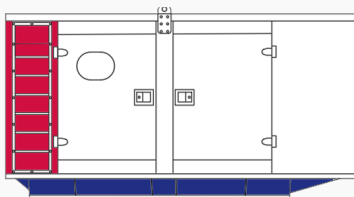

W x L x H (mm)	Weight	Fuel tank	Noise@7M
2470 x 6080 x 2900	13453 kg	1540 Litres	91 db

## Open set data



W x L x H (mm)	Weight	Fuel tank	Noise@7M
2050 x 4600 x 2640	9763 kg	1540 Litres	N/A

\*\* The images are for illustration purposes only.

Unit 2, Hurricane Close, Sherburn in Elmet, Leeds, LS25 6PB, United Kingdom  
+44 1977 688155 • sales@yorpowers.com

[www.yorpowers.com](http://www.yorpowers.com)