

Genset  
Model:

# YC220RSC

Enclosed set



Frequency	Phases	Power Factor	Prime Output	Standby Output
50Hz	3	0.8	200 kVA / 160 kW	220 kVA / 176 kW

## Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

## Design features

- High quality assembly, providing stiffness and low vibration
- Powder coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

## Design Standards

- CE marking
- ISO8528-1995
- GB/T2820-1997
- ISO 9001:2015 Registered Company

## Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank
- Fuel level sensor
- Auto start control system with electronic digital control module
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V starter battery with leads and switch

## Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs
- Forklift holes in base

\*\* The images above are for illustration purposes only.


## Engine data

Engine brand	Cummins	Total coolant capacity	30.2 Litres
Engine model	QSB7G5	Total lube oil capacity	19 Litres
Engine speed	1500 RPM	Cooling air flow	5.91
Number of cylinders	6	Exhaust gas flow	35.8 m <sup>3</sup> /min
Aspiration	Turbo Charged and Charge Air Cooled	Exhaust gas temperature	561°C
Combustion system	Direct injection		
Piston Speed m/s	6.2	Fuel cons. @ 100% Prime load	45.6 l/hr
Governor type	Electronic	Fuel cons. @ 75% Prime load	36.8l/hr
Cooling system	Water Cooled	Fuel cons. @ 50% Prime load	27.5l/hr

## Alternator data

Alternator brand	Stamford	Number of wires	12 re-connectable
Alternator model	UCI274H	AVR model	MX341
Excitation	Self excited	Voltage regulation	± 0.5%
Insulation class	H	Total Harmonic distortion	No load < 1.5%, on load < 5%
Drip proof protection	IP23	Telephone interference	THF < 2%
Winding pitch	2/3	Flanges and shield	Aluminium

## Enclosed set data

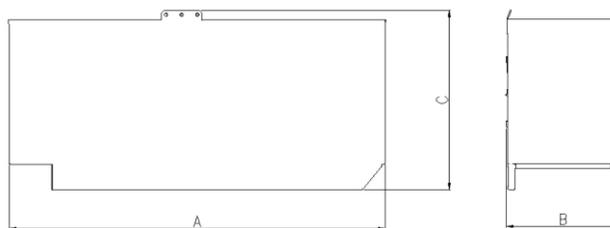

L x W x H (mm)	Weight	Fuel tank	Noise@1M
3904 x 1142 x 2276	3018kg	464 Litres	77dBA

\*\* Due to constant innovation, design and specifications are subject to change without notice.