

Genset
Model:

YXC900RS

Enclosed set



Open set



Frequency	Phases	Power Factor	Prime Output	Standby Output
50Hz	3	0.8	810 kVA / 648 kW	900 kVA / 720 kW

Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

Design features

- High quality assembly, providing stiffness and low vibration
- Power coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

Design Standards

- CE marking
- ISO8528-1995
- GB/T2820-1997
- ISO 9001:2008 Registered Company

Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank with fully banded base protection.
- Fuel level sensor
- Auto start control system with electronic digital control module DSE7420
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 24V starter battery with leads and switch

Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs
- Forklift holes in base

** The images above are for illustration purposes only.

Engine data


Engine brand	Cummins	Total coolant capacity	46.5 Litres
Engine model	QSK23-G3	Total lube oil capacity	74-103 Litres
Engine speed	1500 RPM	Compression Ratio	16.0 : 1
Number of cylinders	6	Maximum Back Pressure	76.2 mm Hg
Aspiration	Turbocharged and Low Temperature Aftercooled	Fuel cons. @ 110% standby load	178 l/hr
Bore and stroke	170mm x 170mm	Fuel cons. @ 100% Prime load	161 l/hr
Displacement	23.15 Litres	Fuel cons. @ 75% Prime load	121 l/hr
Fuel system	Direct Injection	Fuel cons. @ 50% Prime load	85 l/hr

Alternator data


Alternator brand	Newage Stamford	Stator Winding	Double layer LAP
Alternator model	HCI634G	AVR model	MX321
Excitation	Self excited	Voltage regulation	± 0.5%
Insulation class	H	Winding Leads	6
Drip proof protection	IP23	Telephone interference	TIF < 50%, THF < 2%
Winding pitch	2/3	Waveform Distortion	No load < 1.5%

Enclosed set data


Open set data

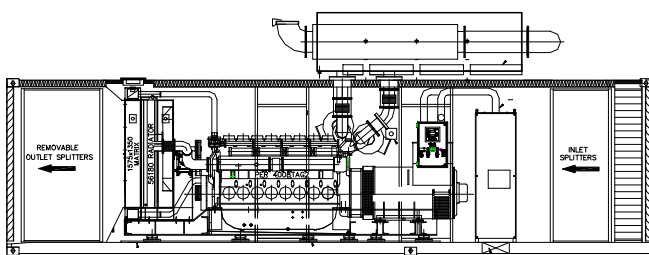

L x W x H (mm)	Weight	Fuel tank	Noise@7M
6058 x 2438 x 2591	9000 kg	1450 Litres	TBC

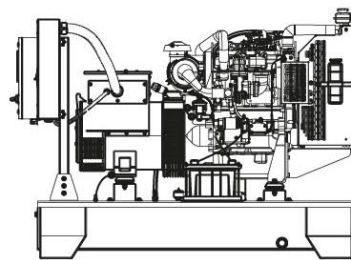

L x W x H (mm)	Weight	Fuel tank	Noise@7M
4440 x 1720 x 2425	6610 kg	NO FUEL TANK	TBC



** Due to constant innovation, design and specifications are subject to change without notice.

YORPOWER

Tel: +44 (0) 1977 688155
Fax: +44 (0) 1977 688158

YorPower Ltd. | Unit 2 Hurricane Close | Sherburn in Elmet | LS25 6PB | United Kingdom
E-mail | sales@yorpower.com | Web | www.yorpower.com
Registered in England and Wales No. 7035780

